

11/08/00



IRRELL C. BIRCH
RAYMOND C. STEWART
JOSEPH A. KOLASCH
JAMES M. SLATTERY
BERNARD L. SWEENEY*
MICHAEL K. MUTTER
CHARLES GORENSTEIN
GERALD M. MURPHY, JR.
LEONARD R. SVENSSON
TERRY L. CLARK
ANDREW D. MEIKLE
MARC S. WEINER
JOE McKINNEY MUNCY
ROBERT J. KENNEY
DONALD J. DALEY
JOHN W. BAILEY
JOHN A. CASTELLANO
GARY D. YACURA

OF COUNSEL
HERBERT M. BIRCH (1905-1996)
ELLIOT A. GOLDBERG*
WILLIAM L. GATES*
EDWARD H. VALANCE
ROBERT J. BRADY (RET)*
F. PRINCE BUTLER
FRED S. WHISENHUNT

*ADMITTED TO A BAR OTHER THAN VA

BIRCH, STEWART, KOLASCH & BIRCH, LLP

INTELLECTUAL PROPERTY LAW
8110 GATEHOUSE ROAD
SUITE 500 EAST
FALLS CHURCH, VA 22042-1210
USA

(703) 205-8000

FAX (703) 205-8050
(703) 698-8590 (G IV)

e-mail: mailroom@bskb.com
web: http://www.bskb.com

CALIFORNIA OFFICE
COSTA MESA, CALIFORNIA

THOMAS S. AUCHTERLONIE
JAMES T. ELLER, JR.
SCOTT L. LOWE
MARK J. NUEL, PH.D.
D. RICHARD ANDERSON
PAUL C. LEWIS
MARK W. MILSTEAD*
RICHARD J. GALLAGHER
JAYNE M. SAYDAH*
MARYANNE ARMSTRONG, PH.D.
HYUNG N. SOHN
ALAN PEDERSEN-GILES
KECIA J. REYNOLDS

REG. PATENT AGENTS.
FREDERICK R. HANDREN
MAKI HATSUMI
MIKE S. RYU
CRAIG A. McROBBIE
GARTH M. DAHLEN, PH.D.
ROBERT E. GOOZNER, PH.D.
MATTHEW J. LATTIG
TIMOTHY R. WYCKOFF
KRISTI L. RUPERT, PH.D.
LARRY J. HUME
ALBERT K. LEE
HAYR A. SAYADIAN, PH.D.
EVE L. FRANK, PH.D.
MATTHEW T. SHANLEY

11/08/00
09/708081
U.S. PAT. D.



Date: November 8, 2000
Docket No.: 0879-0286P

Assistant Commissioner for Patents
Box PATENT APPLICATION
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): TANAKA, Hiroshi
WATANABE, Mikio

For: CAMERA

Enclosed are:

- ☒ A specification consisting of 13 pages
- ☒ 07 sheet(s) of Formal drawings
- ☒ An assignment of the invention
- ☒ Certified copy of Priority Document(s)
- ☒ Executed Declaration ☒ Original ☐ Photocopy
- ☐ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27
- ☐ Preliminary Amendment
- ☐ Information Disclosure Statement, PTO-1449 and reference(s)

0879-0286P



Other _____

The filing fee has been calculated as shown below:

LARGE ENTITY			SMALL ENTITY		
FOR	NO. FILED	NO. EXTRA	RATE	FEE	
BASIC FEE	***** ***** *****	***** ***** *****	***** ***** *****	\$710.00	or
					**** **** ****
TOTAL CLAIMS	2 - 20 =	0	x18 = \$	0.00	or x 9 = \$ 0.00
INDEPENDENT	1 - 3 =	0	x80 = \$	0.00	or x 40 = \$ 0.00
MULTIPLE DEPENDENT CLAIM PRESENTED <u>no</u>			+270 = \$	0.00	or +135 = \$ 0.00
TOTAL \$			710.00	TOTAL \$ 0.00	

X A check in the amount of \$ 750.00 to cover the filing fee and recording fee (if applicable) is enclosed.

Please charge Deposit Account No. 02-2448 in the amount of \$ _____. A triplicate copy of this transmittal form is enclosed.

No fee is enclosed.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 02-2448 for any additional fees required under 37 C.F.R. 1.16 or under 37 C.F.R. 1.17; particularly, extension of time fees.

Respectfully submitted,

BIRCH, STEWART, KOLASCH & BIRCH, LLP

By _____

DONALD J. DALEY
Reg. No. 34,313

P. O. Box 747

Falls Church, Virginia 22040-0747

(703) 205-8000
DJD/rem

CAMERA

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a camera, particularly to a camera
5 provided with a radio communication antenna used to perform radio
communication with other unit.

Description of Related Art

Japanese Patent Laid-Open No. 9-116778 specification discloses a
compact electronic camera system provided with a rod antenna for radio
10 communication allowing high-speed image-data transmission and having
superior operability and portability.

However, the antenna for radio communication of the electronic camera
disclosed in Japanese Patent Laid-Open No. 9-116778 specification is a rod
antenna that protrudes beyond the camera. It is generally necessary to make a
15 camera compact and attitudes of a camera, which is different from general
communication devices are generally changed for longitudinal-position
photographing, upward photographing, and downward photographing in
accordance with an object. Therefore, troubles have occurred that a position of
an antenna cannot be limited, radio communication performance is deteriorated,
20 a user unconsciously covers the antenna, or touches the antenna, and resultantly
communication performance is deteriorated.

Moreover, when connecting an electronic camera with a portable radio
communication terminal by a cable to radio-transmit the image data in the
electronic camera, troubles have occurred that a user unconsciously covers the

antenna section of the radio communication terminal and an antenna turns to a direction not suitable for radio communication, and thereby radio communication performance is deteriorated. Moreover, troubles have occurred that an electronic camera increases in size and the cost is increased when using a conventional structure in which an antenna for radio communication protrudes beyond the electronic camera.

SUMMARY OF THE INVENTION

The present invention is made to solve the above problems and its object is to provide a camera allowing radio communication with other unit without using an independent radio antenna by jointly using a conductive component previously provided for the camera as a radio antenna.

To achieve the above object, the present invention is directed to a camera comprising: a communication device which allows radio communication with other unit; and a radio antenna, wherein a conductive component previously provided for the camera and insulated from a camera housing but not electromagnetically shielded is jointly used as the radio antenna.

According to the present invention, because a conductive component previously provided for a camera and insulated from a camera housing but not electromagnetically shielded is jointly used as a radio antenna, the camera allows radio communication with other unit without using an independent radio antenna.

BRIEF DESCRIPTION OF THE DRAWINGS

The nature of this invention, as well as other objects and advantages thereof, will be explained in the following with reference to the accompanying

drawings, in which like reference characters designate the same or similar parts throughout the figures and wherein:

FIG. 1 is a block diagram of an electronic camera;

FIG. 2 is an illustration showing a plurality of connective units that can be connected each other through radio;

FIG. 3 is a perspective view showing an embodiment for a radio-antenna setting position;

FIG. 4 is a sectional view showing an embodiment in which a radio antenna is provided for a hot shoe of an electronic camera;

FIG. 5 is a sectional view showing an embodiment in which a radio antenna is provided for a light-emitting device of an electronic camera;

FIG. 6 is a sectional view showing an embodiment in which a radio antenna is provided for a strap holder of an electronic camera; and

FIG. 7(a) is a sectional view showing an example in which a radio antenna is mounted on a lens tube and FIG. 7(b) is a front view showing an example in which a radio antenna is used as a loop antenna.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The preferred embodiment of a camera of the present invention is described below in detail by referring to the accompanying drawings.

FIG. 1 is a block diagram of an electronic camera 10 allowing radio communication.

The camera 10 comprises an image pickup device 12 for focusing the image of an object on a light-receiving plane to photoelectrically convert the image, and outputting the image as image data; an information processing device 14 for performing general control of the electronic camera 10, image-data sampling timing control, image-data recording control, image-data graphic

recognition, image-data flickering recognition, and read of information for the type of the electronic camera 10, communication control, and display control; an image processing device 16 for performing change of image sizes, sharpness correction, gamma correction, contrast correction, and white balance correction; a frame memory 18 for temporarily storing image data, a designation device 19 provided with a release button, communication button, transmission button, function switch, cross key, decision switch, and mode change dial; a compression/expansion device 20 for compressing or expanding the information of image data or the like through the technique such as JPEG or motion JPEG or expanding, developing, and controlling compressed data; and a recording-medium interface 24 for converting data in order to record or read image data in or from a removable recording medium 22. The recording medium 22 is a removable recording medium represented by a semiconductor such as a memory card of MO, magnetic recording, or optical recording.

The information processing device 14 connects with a ROM storing the type and the intrinsic number such as serial number of the electronic camera 10, an operating program, and various constants, and a memory 26 configured by a RAM which is a storage device serving as a work area when the program is executed.

The radio communication device of the electronic camera 10 used to transmit and receive image data or the like with an external unit through communication is configured by a transmit/receive device 28 for transmitting and receiving information such as image data by a command from the information processing device 14, a high-frequency module 29 for transmitting the information such as image data by superposing it on generated carriers and an antenna 30 for transmitting and receiving carriers and data through radio.

Moreover, the electronic camera 10 is provided with a D/A converter 34 for displaying image data on a display device 32, a character generator 36 for

converting the code information commanded by the information processing device 14 into data of characters or message to be displayed, a light-emitting device 37 for emitting light simultaneously with photographing to compensate the deficiency of light quantity when photographing an object, and a light-emitting circuit 38 for storing the power for making the light-emitting device 37 emit light, outputting a signal for ordering light emission at the timing of photographing, and adjusting the light quantity of the object.

Photographing by the electronic camera 10 having the above constitution will be described below.

An image to be photographed is focused on the light-receiving plane of the image pickup device 12, and the focused object image is photoelectrically converted and output to the image processing device 16. Image data thus obtained is amplified and reduced in noises by the image processing device 16 and temporarily stored in the frame memory 18. The information processing device 14 sequentially transfers the image data stored in the frame memory 18 to the D/A converter 34 to display the data on the display device 32.

By pressing a release button provided for the designation device 19, a mode for photographing an object is set. Then, the information processing device 14 transfers the image data stored in the frame memory 18 to compression/expansion device 20 and outputs a command for compressing the image data under a predetermined condition. Then, the information processing device 14 sequentially records image data in the recording medium 22 for the recording-medium interface 24. When the light quantity of the object is insufficient for photographing, the information processing device 14 previously stores the power for light emission in the light emitting circuit 38 to make the light-emitting device 37 emit light at the timing for performing photographing by pressing the release button and stops light emission when determining that the light quantity of the object becomes proper in accordance with the light

emission.

FIG. 2 shows a plurality of units that can be connected each other by radio.

According to FIG. 2, there are a plurality of radio-communicable electronic cameras 10, 70, 72, and 74 and a printer 76 to which a recording medium 78 can be set around a communication terminal 40 such as a radio telephone so that information such as image data can be transferred each other.

As shown in FIG. 2, the communication terminal 40 is provided with an antenna 42 for performing radio communication with a public line, a radio communication device 44 for performing close-range radio communication with a plurality of connective units present around, a display device 46 for displaying the information or image of a connective unit for communication, designation devices 48, 48, ... for designating or selecting a connective unit, telephone number, character, or image or voice data and designating an output unit or the address of the data, a loud speaker 50 for serving as a receiver of a telephone and outputting voices, and a microphone 52 for inputting voices.

By pressing a transmission button provided for the designation device 19 of the electronic camera 10 after the electronic camera 10 establishes the communication with the communication terminal 40, the information processing device 14 sequentially reads designated image data from the recording medium 22 to convert the image data into a predetermined data format and then, transmits the data to the external communication terminal 40 through the transmit/receive device 28, the high-frequency module 29, and the antenna 30.

It is allowed to use a protocol according to the specification of "Bluetooth" or "Radio LAN" recently noticed as the protocol for close-range communication of the radio communication device 44. Moreover, the communication terminal 40 can use a mobile communication unit such as a portable telephone or PHS generally used or a personal computer or printer for

transmitting the information such as image data through communication.

When the frequency of the radio wave used for radio communication reaches a radio frequency of approx. 2.5 GHz, the length of the radio wave becomes approx. 12 cm. Since it is allowed that the antenna length for radio communication resonates at values of $1/2$, $1/4$, $1/8$... of the wavelength and communication is realized even by a weak radio wave only in the case of close-range radio communication, it is enough that the length of a radio antenna is approx. 1.5 cm. Therefore, it is possible to use a component previously provided for the electronic camera 10 and having a proper conductivity as a radio antenna. When independently providing an exclusive radio antenna for the electronic camera 10, a trouble occurs that the electronic camera 10 increases in size and thereby, interrupts operations.

FIG. 3 shows an embodiment for a setting position of a radio antenna.

As shown in FIG. 3, the electronic camera 10 includes a lens tube 80 provided with a lens for focusing the image of an object on the plane of a light receiving element during photographing, the light-emitting device 37 such as a flash, a hot shoe 82 to which an accessory such as an external flash will be set, a strap holder 86 to which a strap 84 for a user to carry the electronic camera 10 will be set, a release button 88 for designating photographing by the electronic camera, a mode-switching dial 90 for switching various operation modes of the electronic camera 10, a medium cover 92 serving as the cover of a storing section into which a recording medium removable from the electronic camera 10 will be inserted, and a battery cover 94 serving as a cover of a portion for storing a battery serving as the power source of the electronic camera 10.

A camera of the present invention realizes radio communication without deteriorating the portability or radio communication performance of the electronic camera 10 by providing a radio antenna constituted by a conductive component for portions not electromagnetically shielded such as the lens tube 80,

the light-emitting device 37, the hot shoe 82, the strap holder 86, the release button 88, the mode-switching dial 90, the medium cover 92, and the battery cover 94.

FIG. 4 shows a sectional view of a detailed embodiment in which a radio antenna is provided for a hot shoe of an electronic camera.

In FIG. 4, the hot shoe 82 constituted by a conductive component for setting an accessory such as a flash to the electronic camera 10 is screwed to an armor member 96 of the electronic camera 10 through an insulating spacer 98 and an insulating washer 100 by a hot-shoe fixing screw 102. Therefore, even if the armor member 96 of the electronic camera 10 is made of a conductive material, the hot shoe 82 is fixed while being insulated from the armor member 96.

Because a cable 104 for a high frequency output from the high-frequency module 29 is connected to the hot shoe 82 and radio waves can be transmitted or received through the hot shoe 82, the hot shoe 82 functions as a radio antenna. Moreover, because the hot shoe 82 is a member exposed to the outside of the electronic camera 10 but it is not provided for a place to be unconsciously touched by a user, it is favorable to use the hot shoe 82 for communication as a radio antenna when performing radio communication. Moreover, because setting the high-frequency module 29 nearby the hot shoe 82 makes it possible to shorten a high-frequency cable, it is possible to efficiently transmit a generated high frequency from the hot shoe 82.

FIG. 5 shows a sectional view of a detailed embodiment in which a radio antenna is provided for the light-emitting device of an electronic camera.

In FIG. 5, the light-emitting device 37 of the electronic camera 10 is provided with a reflector 106 set to the armor member 96 of the electronic camera 10 to adjust the luminous intensity distribution of the light to be applied to an object and a discharge tube 108 for emitting light to the object. In general,

the reflector 106 of the light-emitting device 37 is constituted by a conductive component and insulated from the armor member 96 because a voltage serving as a trigger for the discharge tube 108 to emit light is applied. Therefore, it is favorable to use the reflector 106 as a radio antenna.

5 The cable 104 for a high frequency output from the high-frequency module 29 is connected to the reflector 106 and radio waves can be transmitted or received through the reflector 106. Therefore, the reflector 106 functions as a radio antenna.

10 Moreover, the light-emitting device 37 is generally present at a position making it possible to transmit and receive radio waves to and from the outside of the electronic camera 10 but the position is not unconsciously touched by a user. Therefore, the communication performance is not deteriorated even if the reflector 106 is used as a radio antenna.

15 FIG. 6 shows a sectional view of a detailed embodiment in which a radio antenna is provided for the strap holder of an electronic camera.

20 In FIG. 6, a strap holder 86 of the electronic camera 10 constituted by an insulator is fixed to the armor member 96 of the electronic camera 10 and a radio antenna 110 constituted by a conductive component is set in the strap holder 86. Because the radio antenna 110 is connected to a line for the radio antenna of the high-frequency module 29, it is possible to transmit or receive radio waves. Because the strap holder 86 is generally exposed to the outside of the electronic camera 10, it is favorable to use the holder 86 as a radio antenna.

25 Moreover, it is allowed to constitute the strap holder 86 by setting the conductive strap 84 to the holder 86 so as to lengthen a radio antenna or constitute the strap holder 86 of a plastic material when the holder 86 protrudes long. Furthermore, it is allowed to constitute the strap holder 86 of a conductive material so as to function as a radio antenna by insulating the holder 86 from the armor member 96.

FIG. 7(a) shows a detailed sectional view when a radio antenna is mounted on a lens tube.

In FIG. 7(a), a lens tube 80 constituted by an insulator holding a lens 112 and a protective lens 114 is fixed to a front armor member 96. Moreover, a loop antenna 116 constituted by a conductive component for holding the protective lens 114 and functioning as a radio antenna is provided for a part of the lens tube 80. As shown in FIG. 7(b), the loop antenna 116 is connected with the high-frequency module 29 by high-frequency cables 104 and 104. FIG. 7(a) is described by using an example in which the loop antenna 116 is set to the inside of the lens tube 80. However, it is also allowed to the loop antenna 116 for an operation ring or lens-holding ring on the outside of the lens tube.

Thus, by setting the loop antenna 116 to the lens tube 80, it is possible to obtain a large antenna and preferably keep a communication state.

Moreover, in FIG. 3, it is possible to achieve an object of the present invention by constituting the mode-switching dial 90, a camera operating button such as the release button 88, an operating dial, and an operating member represented by an operating lever of conductive components, insulating the components from the armor member 96 of the electronic camera 10, connecting them with a high-frequency cable 104, and using them as a radio antenna.

Furthermore, it is allowed to use the medium cover 92, battery cover 94, a ring member around a photographing ring, and a lens cover as a radio antenna by constituting the components of conductive components, insulating them from the armor member 96 of the electronic camera 10, and connecting them with the high-frequency cable 104. Thus, by using members necessary for a conventional camera as a radio antenna, it is unnecessary to newly independently use a radio antenna. Therefore, it is possible to decrease a camera in size and decrease the cost.

As described above, a camera of the present invention jointly uses a

conductive component previously provided for the camera and insulated from a camera housing but not electromagnetically shielded as a radio antenna. Therefore, the camera allows radio communication with other unit without using an independent radio antenna.

- 5 It should be understood, however, that there is no intention to limit the invention to the specific forms disclosed, but on the contrary, the invention is to cover all modifications, alternate constructions and equivalents falling within the spirit and scope of the invention as expressed in the appended claims.

09708894-1 10000

WHAT IS CLAIMED IS:

1. A camera comprising:
a communication device which allows radio communication with other unit; and
a radio antenna,
wherein a conductive component previously provided for the camera and insulated from a camera housing but not electromagnetically shielded is jointly used as the radio antenna.
2. The camera according to claim 1, wherein the conductive component includes any one of a hot shoe to which an accessory is set, a reflector of a flash, a strap, a strap setting member, a ring member around a photographing ring, a camera operating button, a camera operating dial, a camera operating lever, a lens cover, a cover of a battery, and a cover of a recording-medium storing section.

ABSTRACT OF THE DISCLOSURE

To provide a camera capable of performing radio communication with other unit by jointly using a conductive component previously provided for the camera as a radio antenna without using an independent radio antenna. Because a conductive component (e.g. a reflector of flash) previously provided for an electronic camera and insulated from a camera housing but not electromagnetically shielded is jointly used as a radio antenna, the electronic camera can perform radio communication with other unit without using an independent antenna.

09708084 140840

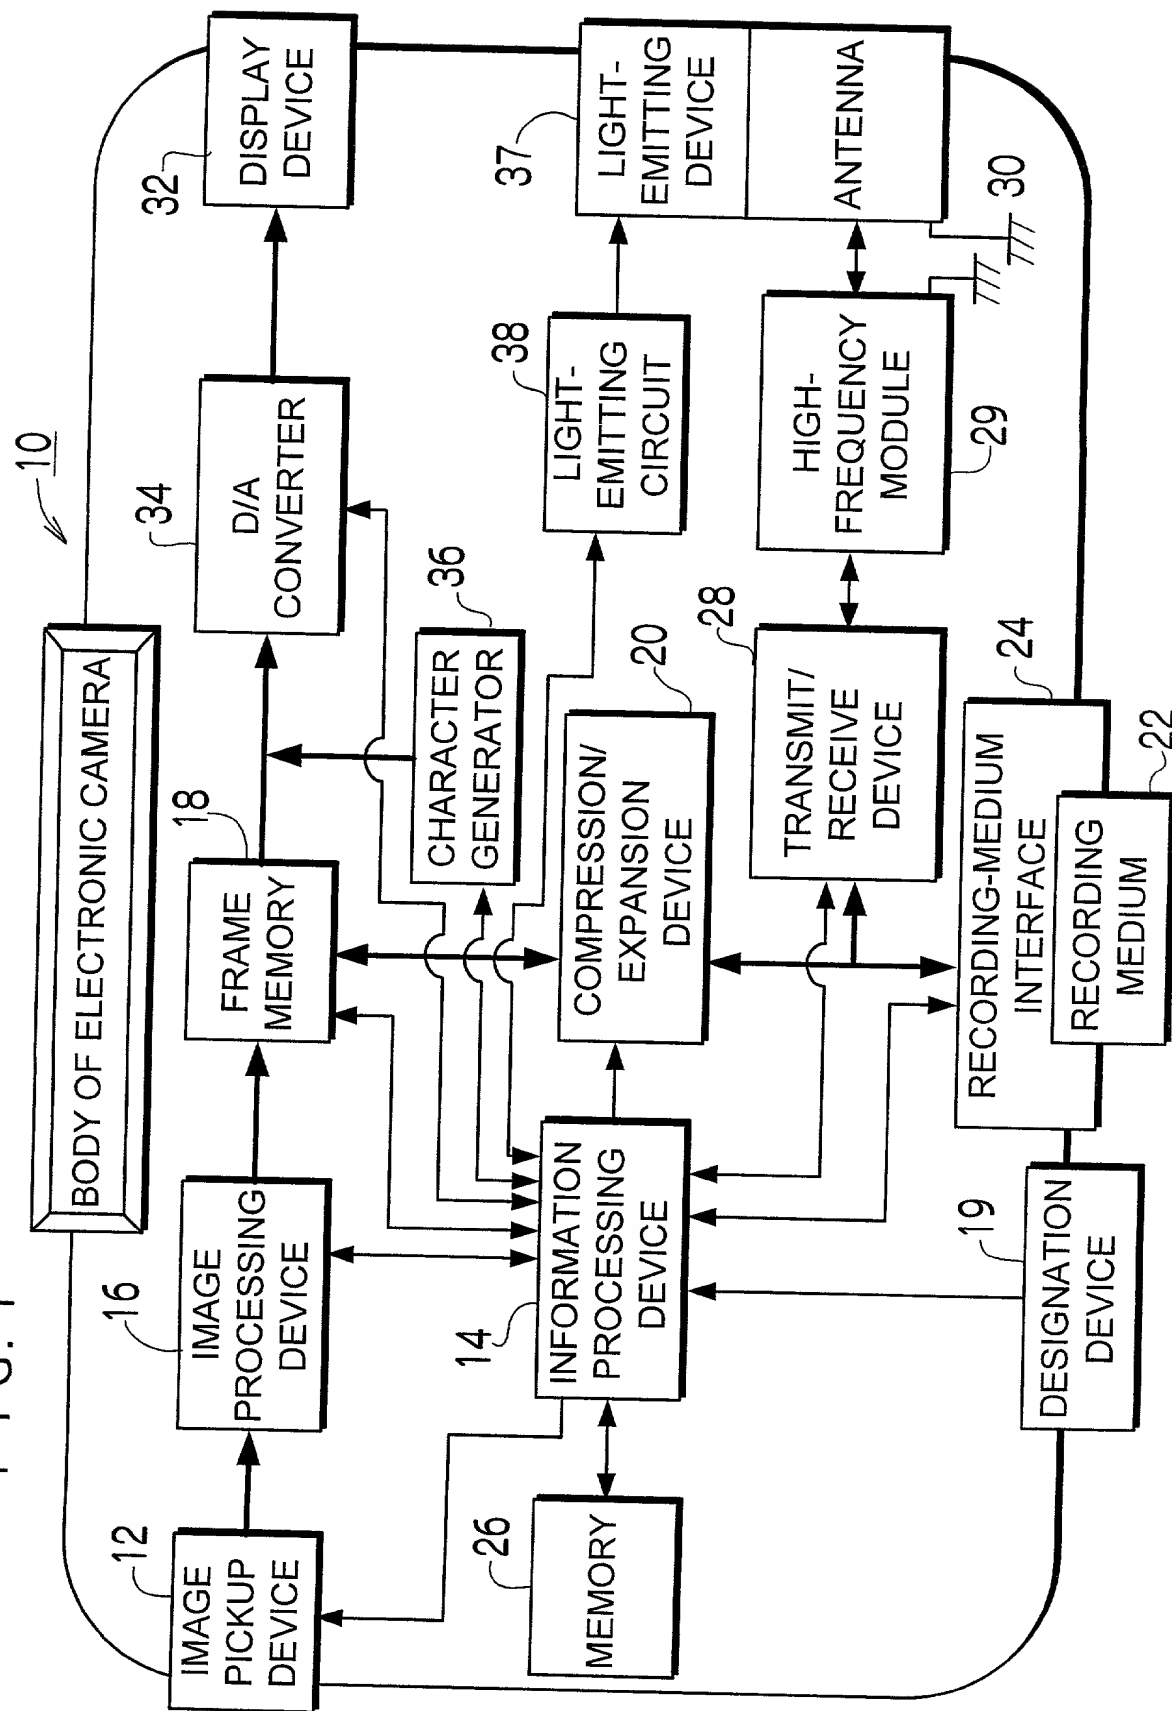
[illegible]

FIG. 2

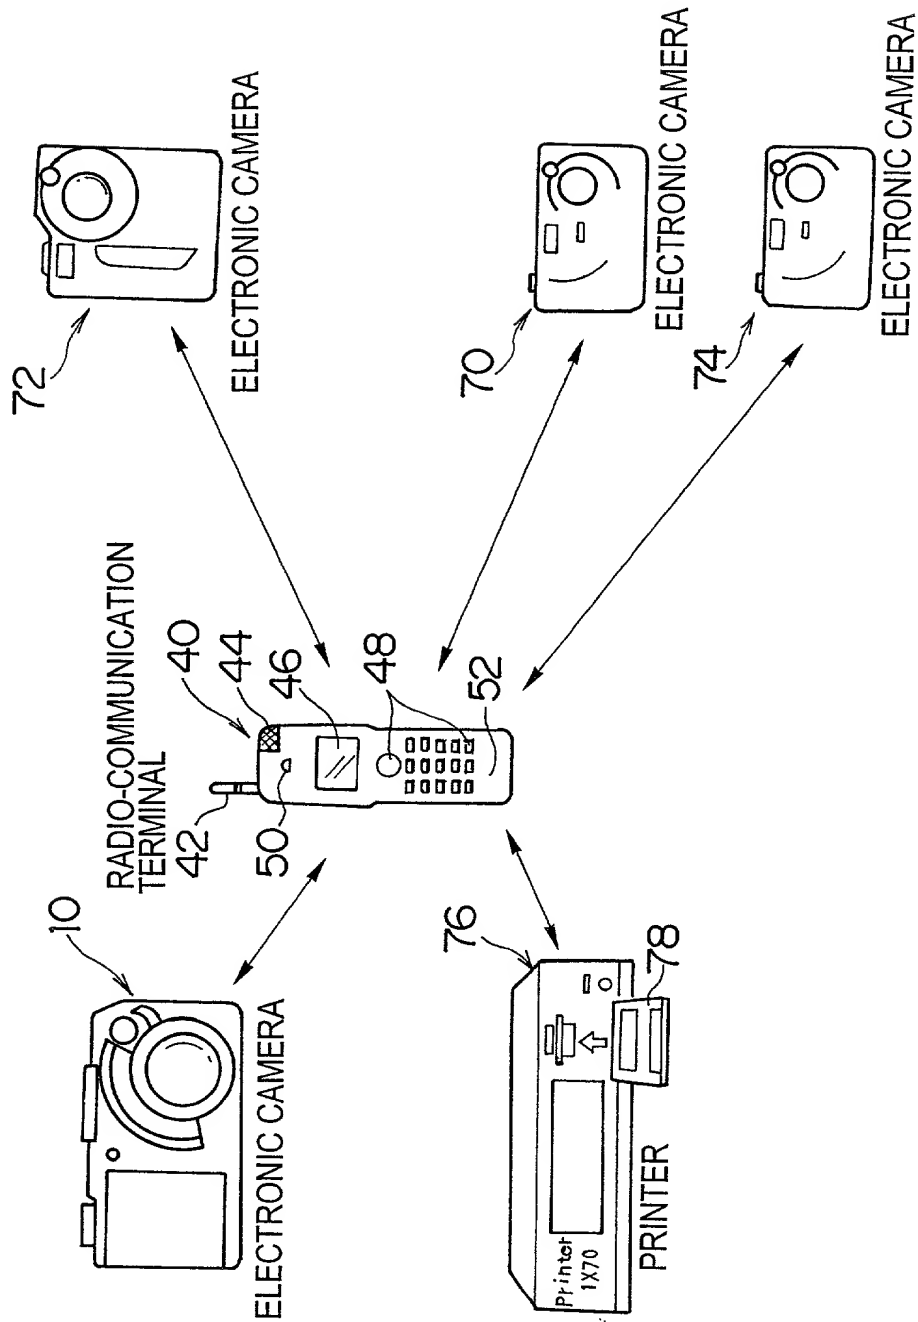


FIG. 3


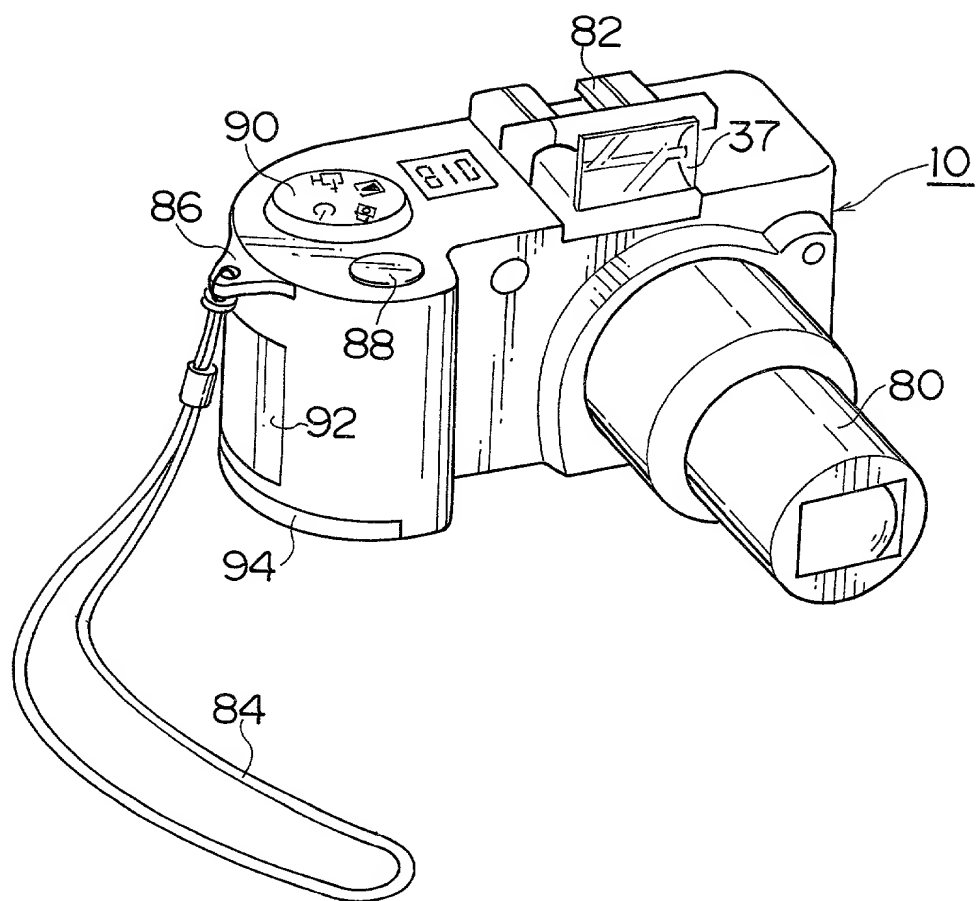


FIG. 5

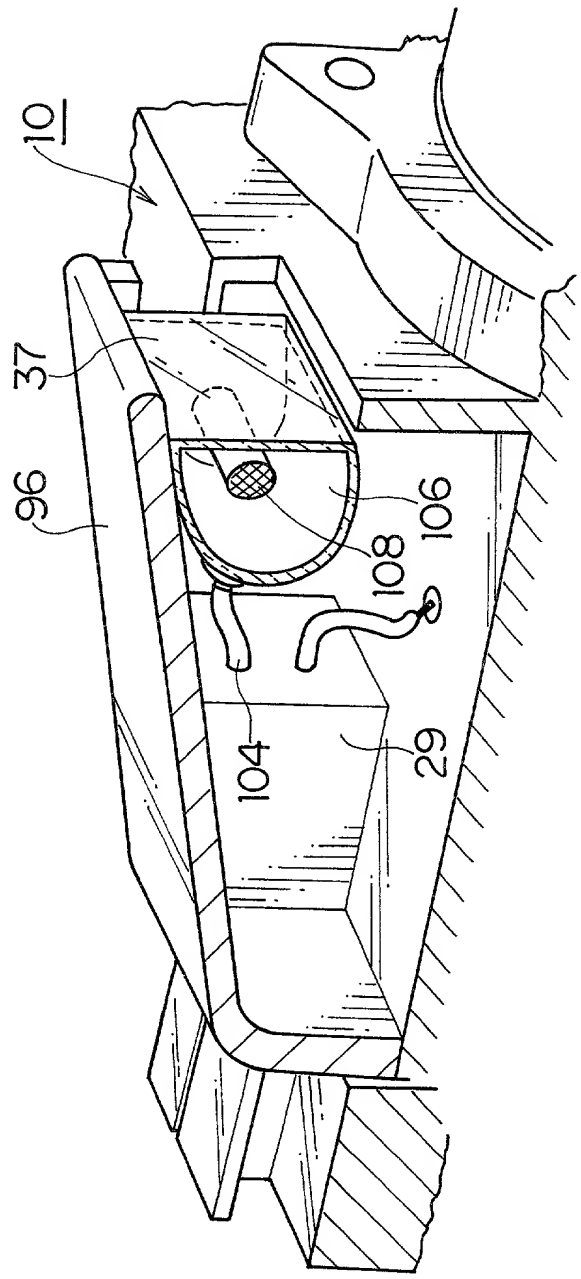

F I G. 6



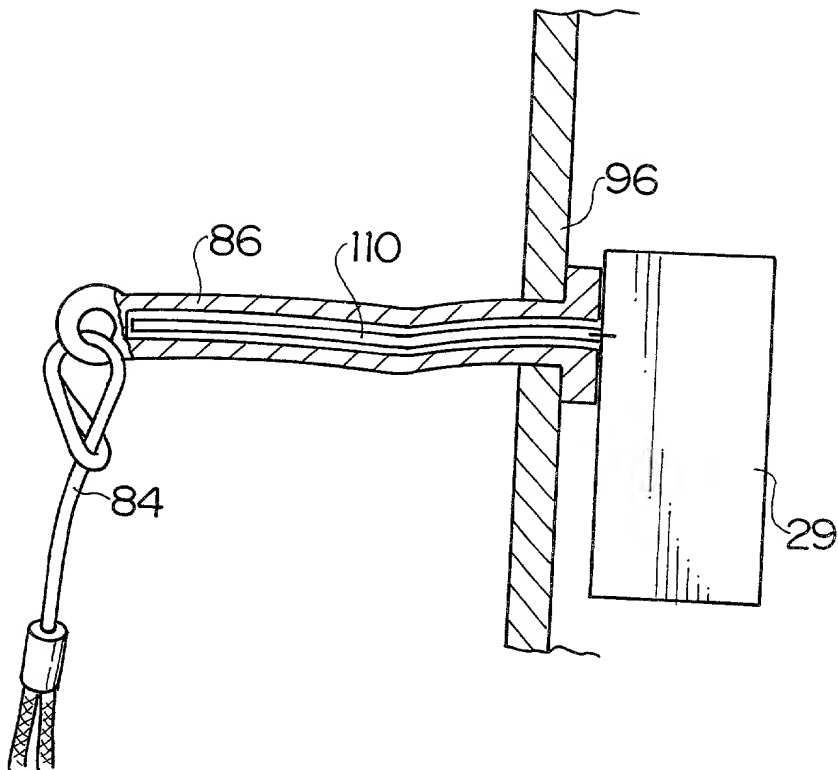


FIG. 7(a)

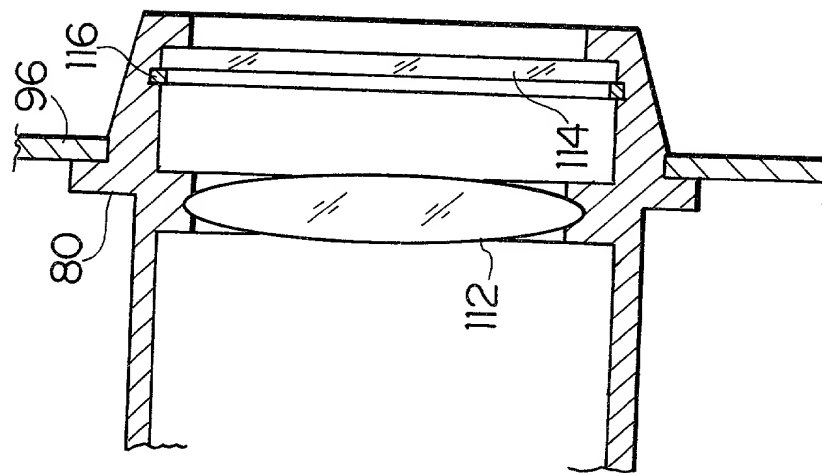

F I G. 7 (b)

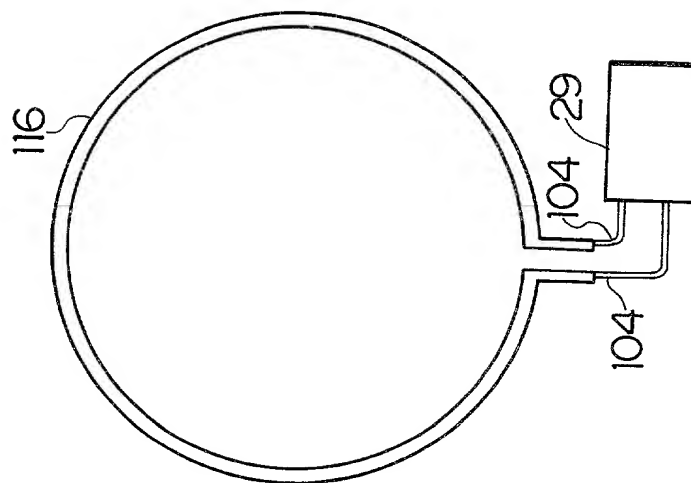

PLEASE NOTE:
YOU MUST
COMPLETE THE
FOLLOWING

BIRCH, STEWART, KOLASCH & BIRCH, LLP

P.O. Box 747 • Falls Church, Virginia 22040-0747
Telephone: (703) 205-8000 • Facsimile: (703) 205-8050

Attorney Docket No.
879-286P

**COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT AND DESIGN APPLICATIONS**

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated next to my name; that I verily believe that I am the original, first and sole inventor (if only one inventor is named below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

CAMERA

Insert Title:

Fill in Appropriate
Information -
For Use Without
Specification
Attached:

the specification of which is attached hereto. If not attached hereto,
the specification was filed on _____ as
United States Application Number _____;
and amended on _____ (if applicable) and/or
the specification was filed on _____ as PCT
International Application Number _____; and was
amended under PCT Article 19 on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I do not know and do not believe the same was ever known or used in the United States of America before my or our invention thereof, or patented or described in any printed publication in any country before my or our invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, that the invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representative or assigns more than twelve months (six months for designs) prior to this application, and that no application for patent or inventor's certificate on this invention has been filed in any country foreign to the United States of America prior to this application by me or my legal representatives or assigns, except as follows.

I hereby claim foreign priority benefits under Title 35, United States Code, §119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

Insert Priority
Information:
(if appropriate)

11-316600	Japan	11/08/1999	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
(Number)	(Country)	(Month/Day/Year Filed)		
_____	_____	_____	<input type="checkbox"/> Yes	<input type="checkbox"/> No
(Number)	(Country)	(Month/Day/Year Filed)		
_____	_____	_____	<input type="checkbox"/> Yes	<input type="checkbox"/> No
(Number)	(Country)	(Month/Day/Year Filed)		
_____	_____	_____	<input type="checkbox"/> Yes	<input type="checkbox"/> No
(Number)	(Country)	(Month/Day/Year Filed)		

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional applications(s) listed below.

Insert Provisional
Application(s):
(if any)

_____	_____
(Application Number)	(Filing Date)
_____	_____
(Application Number)	(Filing Date)

All Foreign Applications, if any, for any Patent or Inventor's Certificate Filed More than 12 Months (6 Months for Designs) Prior to the Filing Date of This Application:

Country	Application Number	Date of Filing (Month/Day/Year)
_____	_____	_____
_____	_____	_____

Insert Requested
Information:
(if appropriate)

I hereby claim the benefit under Title 35, United States Code, §120 of any United States and/or PCT application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States and/or PCT application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to the patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Insert Prior U.S.
Application(s):
(if any)

_____	_____	_____
(Application Number)	(Filing Date)	(Status - patented, pending, abandoned)
_____	_____	_____
(Application Number)	(Filing Date)	(Status - patented, pending, abandoned)

I hereby appoint the following attorneys to prosecute this application and/or an international application based on this application and to transact all business in the Patent and Trademark Office connected therewith and in connection with the resulting patent based on instructions received from the entity who first sent the application papers to the attorneys identified below, unless the inventor(s) or assignee provides said attorneys with a written notice to the contrary:

Raymond C. Stewart (Reg. No. 21,066)
 Joseph A. Kolasch (Reg. No. 22,463)
 Bernard L. Sweeney (Reg. No. 24,448)
 Charles Gorenstein (Reg. No. 29,271)
 Leonard R. Svensson (Reg. No. 30,330)
 Andrew D. Meikle (Reg. No. 32,868)
 Joe McKinney Muncy (Reg. No. 32,334)
 John W. Bailey (Reg. No. 32,881)
 Gary D. Yacura (Reg. No. 35,416)

Terrell C. Birch (Reg. No. 19,382)
 James M. Slattery (Reg. No. 28,380)
 Michael K. Mutter (Reg. No. 29,680)
 Gerald M. Murphy, Jr. (Reg. No. 28,977)
 Terry L. Clark (Reg. No. 32,644)
 Marc S. Weiner (Reg. No. 32,181)
 Donald J. Daley (Reg. No. 34,313)
 John A. Castellano (Reg. No. 35,094)

Send Correspondence to:

BIRCH, STEWART, KOLASCH & BIRCH, LLP

or

Customer No. 2292

P.O. Box 747 • Falls Church, Virginia 22040-0747

Telephone: (703) 205-8000 • Facsimile: (703) 205-8050

**PLEASE NOTE:
YOU MUST
COMPLETE
THE
FOLLOWING:**

Full Name of First
or Sole Inventor:
Insert Name of
Inventor
Insert Date This
Document is Signed

Insert Residence
Insert Citizenship

Insert Post Office
Address

Full Name of Second
Inventor, if any:
see above

Full Name of Third
Inventor, if any:
see above

Full Name of Fourth
Inventor, if any:
see above

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

GIVEN NAME/FAMILY NAME Hiroshi TANAKA		INVENTOR'S SIGNATURE <i>Hiroshi Tanaka</i>	DATE* 10/23/2000
Residence (City, State & Country) Asaka-shi, Saitama, Japan		CITIZENSHIP Japanese	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country) 11-46, Sensui 3-chome, Asaka-shi, Saitama, Japan			
GIVEN NAME/FAMILY NAME Mikio WATANABE		INVENTOR'S SIGNATURE <i>Mikio Watanabe</i>	DATE* 10/23/2000
Residence (City, State & Country) Asaka-shi, Saitama, Japan		CITIZENSHIP Japanese	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country) 11-46, Sensui 3-chome, Asaka-shi, Saitama, Japan			
GIVEN NAME/FAMILY NAME		INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)		CITIZENSHIP	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			
GIVEN NAME/FAMILY NAME		INVENTOR'S SIGNATURE	DATE*
Residence (City, State & Country)		CITIZENSHIP	
POST OFFICE ADDRESS (Complete Street Address including City, State & Country)			